




GE  
Lighting

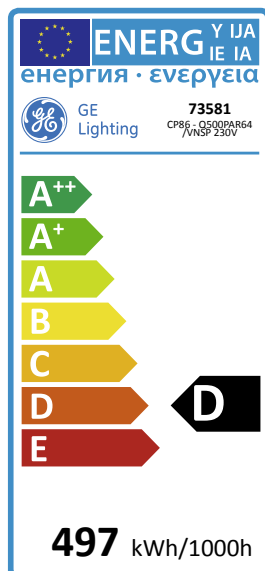

497  
kWh/1000h

D  
energy class

## PAR 64 CP86 - Q500PAR64/VNSP 230V 73581

### Product information

PAR lamps provide a robust and flexible design solution for a wide range of applications. Choice of PAR36, PAR46, PAR56 or PAR64

- 3000 K or 4200 K colour temperature
- Choice of beam widths
- Excellent colour rendering
- High efficiency combined with low operating costs
- Robust and reliable
- UV control
- Easy retrofit
- Colour consistent throughout life
- Colour blends with halogen and fluorescent

### Application areas



Club and Disco



## Product data

Product Code	73581
Bulb Shape	PAR
Bulb Diameter [mm]	204
Maximum Overall Length [mm]	150
Light Center Length [mm]	80
Net weight per piece [g]	821
Gross weight per piece [g]	1072
Brand	General Electric (GE)
Cap/Base	GX16d

## Performance data

Nominal beam angle [°]	15
Nominal center beam candlepower (CBCP) [cd]	240000
Weighted energy consumption [kWh/1000h]	496.62
Energy efficiency class (EEC)	D
Rated Life [h]	300
Nominal correlated colour temperature (CCT) [K]	3200
Colour Rendering Index (CRI) [Ra]	100

## Electrical data

Coil type	C-13
Dimming Capability	Yes
Ballast Required	No
Nominal power [W]	500
Nominal lamp voltage [V]	230

## Logistic data

DUN Code	10043168735817
EAN Code	0043168735810
Pack Quantity	6
Inner pack type	BOX
Outer pack type	OUTER BOX
Layer quantity	24 EUR, 30 UK
Layer quantity EUR	24
Layer quantity UK	30
Pallet quantity EUR (PC)	120
Pallet quantity UK (PC)	150
Outer case size	540 x 365 x 205 (mm)
Product status	Available

## Downloads & Links

[Go to the catalog site \(HTTP\)](#)

[Entertainment Solution Spectrum Catalogue \(PDF\)](#)

[Lighting design tools & calculators \(HTTP\)](#)

[High-res images / Technical drawings \(HTTP\)](#)

[Certificate for the Quality Management System of GE Lighting EMEA \(PDF\)](#)

[Certificate for the Environmental Management System of GE Lighting EMEA \(PDF\)](#)

## Disclaimer

Special purpose lamp – Stage Studio. Not suitable for household illumination.